
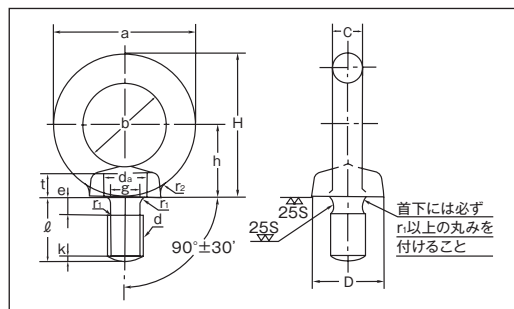


アイボルト・アイナット

販

安全率3


アイボルト

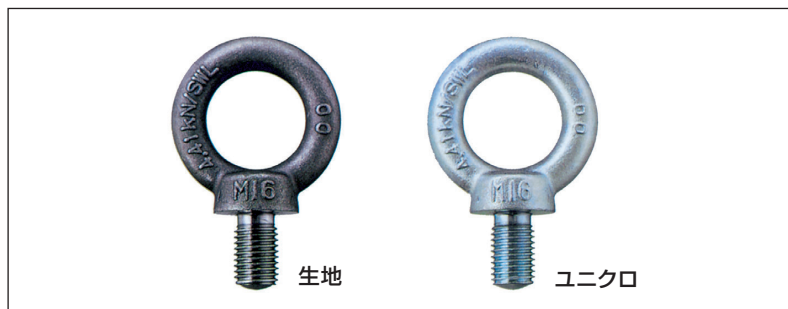



ネジの呼び(d)		a	b	c	D	t	h	H (参考)	l	e	g (最小)	r1 (最小)	da (最大)	r2 (約)	k (約)	使用荷重(垂直吊りまたは2個で45°吊り)		重量 (kg)
Mネジ	Wネジ															Mネジ kN(kgf)	Wネジ kN(kgf)	
6	1/4	26	16	5.8	13.5	6	14	27	14	2	4.5	0.8	7.1	2	1	0.588(60)	—	0.016
8	5/16	32.6	20	6.3	16	5	17	33.3	15	3	6	1	9.2	4	1.2	0.785(80)	—	0.03
10	3/8	41	25	8	20	7	21	41.5	18	4	7.7	1.2	11.2	4	1.5	1.47(150)	1.37(140)	0.06
12	1/2	50	30	10	25	9	26	51	22	5	9.4	1.4	14.2	6	2	2.16(220)	2.16(220)	0.12
16	5/8	60	35	12.5	30	11	30	60	27	5	13	1.6	18.2	6	2	4.41(450)	3.92(400)	0.22
20	3/4	72	40	16	35	13	35	71	30	6	16.4	2	22.4	8	2.5	6.18(630)	5.88(600)	0.39
22	7/8	80	44	19	40	16.5	43	84	35	7	18.5	2.3	24.4	10	2.5	7.74(790)	7.84(800)	0.56
24	1"	90	50	20	45	18	45	90	38	8	19.6	2.5	26.4	12	3	9.32(950)	9.32(950)	0.80
30	1 1/4	110	60	25	60	22	55	110	45	8	25	3	33.4	15	3.5	14.7(1500)	14.7(1500)	1.56
36	1 1/2	133	70	31.5	70	26	65	131.5	55	10	30.3	3	39.4	18	4	22.6(2300)	22.6(2300)	2.90
42	1 3/4	151	80	35.5	80	30	75	150.5	65	12	35.6	3.5	45.6	20	4.5	33.3(3400)	33.3(3400)	4.40
48	2"	170	90	40	90	35	85	170	70	12	41	4	52.6	22	5	44.1(4500)	44.1(4500)	6.10
64	2 1/2	210	110	50	110	42	105	210	90	14	55.7	5	71	25	6	88.3(9000)	88.3(9000)	11.50
80	3"	266	130	63	130	50	130	263	105	14	71	5	87	35	6	147(15000)	127(13000)	26.25
90	—	302	150	74	150	55	150	301	120	14	81	5	97	35	6	177(18000)	167(17000)	46.00
100	4"	340	170	80	170	60	165	335	130	14	91	5	108	40	6	196(20000)	196(20000)	49.00

(単位:mm)

仕 様	
材 質	鉄(SS400) ステンレス(SUS 304)
表面処理	鉄(生地、ユニクロ、クロメート、ドブメッキ)

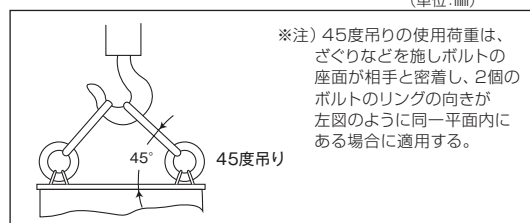

アイナット

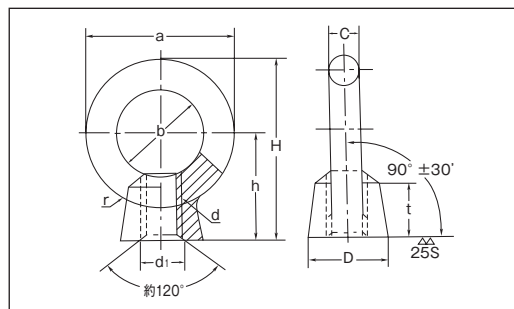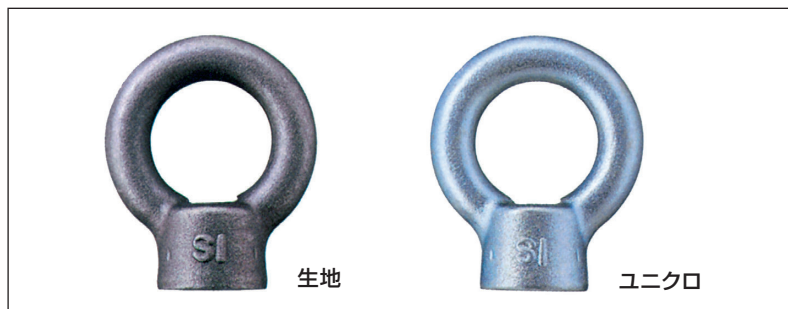

ネジの呼び(d)		a	b	c	D	t	h	H (参考)	r (約)	d1	使用荷重(垂直吊りまたは2個で45°吊り)		重量 (kg)
Mネジ	Wネジ										Mネジ kN(kgf)	Wネジ kN(kgf)	
6	1/4	25	14	6.3	13	10	20	32.5	6	7.5	0.588(60)	—	0.016
8	5/16	32.6	20	6.3	16	12	23	39.3	8	8.5	0.785(80)	—	0.026
10	3/8	41	25	8	20	15	28	48.5	10	10.6	1.47(150)	1.37(140)	0.064
12	1/2	50	30	10	25	19	36	61	12	12.5	2.16(220)	2.16(220)	0.125
16	5/8	60	35	12.5	30	23	42	72	14	17	4.41(450)	3.92(400)	0.223
20	3/4	72	40	16	35	28	50	86	16	21.2	6.18(630)	5.88(600)	0.390
22	7/8	81	44	19	41	33	58	99	20	24	7.74(790)	7.84(800)	0.570
24	1"	90	50	20	45	38	66	111	25	25	9.32(950)	9.32(950)	0.850
30	1 1/4	110	60	25	60	46	80	135	30	31.5	14.7(1500)	14.7(1500)	1.75
36	1 1/2	133	70	31.5	70	55	95	161.5	35	37.5	22.6(2300)	22.6(2300)	3.00
42	1 3/4	151	80	35.5	80	64	109	184.5	40	45	33.3(3400)	33.3(3400)	4.65
48	2"	170	90	40	90	73	123	208	45	50	44.1(4500)	44.1(4500)	6.60
64	—	210	110	50	110	90	151	256	50	67	88.3(9000)	88.3(9000)	13.80
80	—	266	140	63	130	108	184	317	60	85	147(15000)	127(13000)	28.50

(単位:mm)

※寸法と図の形状は、現品と異なる場合があります。また仕様及び寸法は予告なく変更する場合があります。